




EMCL50T

Bracket

- It can be installed on the wall by adopting wall mounting type bracket.



Φ32 type



Mount bracket

PRODUCT SPECIFICATION

EMCL50T

Materials Housing-Al, Lens-PC**Ambient operating temperature** -25°C to +55°C**Volume** Max. 85dB at 1m**Protection rating** IP69K


- Small indicator light capable of transmitting three signal colors with one indicator light
- By applying a milky translucent lens, the unique color of the LED is emitted subtly when turned on
- Waterproof and dustproof model with fully sealed structure with IP69K degree of protection to cope with harsh environmental conditions
- Additional function model selectable (T: touch function)
- Buzzer specifications can be selected for signal wire withdrawal type or M12 connector mounting type

EMCL50T Industrial LED beacon

Model number	Voltage	Current	Certificates	Weight	Color
EMCL50T Steady	DC12 ~ 30V	Max.40mA	CE	0.21kg	<div style="display: flex; flex-direction: column; align-items: center;"> <div style="display: flex; align-items: center; margin-bottom: 2px;">● R-Red</div> <div style="display: flex; align-items: center; margin-bottom: 2px;">● A-Amber</div> <div style="display: flex; align-items: center;">● G-Green</div> </div>

Technical Diagram

Units: mm

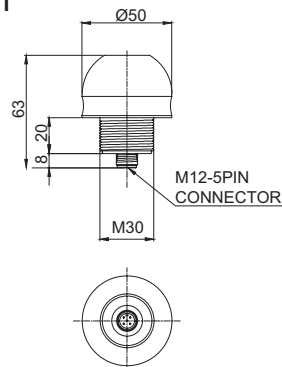•EMCL50T**Customization**

- M12 Five- Core Cable/1.5m
- NPN typea

M12 connector equipped

5PIN CONNECTOR		Color		
No.	Diagram	Before contact	After contact	Wiring
2		NONE	RED	Pin 1+Pin 4((-)Common)
1		GREEN	AMBER	Pin 1+Pin 3 +Pin 4((-)Common)

Ordering Specification

EMCL50T	-	12/24	-	RAG
[Model number]		[Voltage]		[Color]
EMCL50T		12/24-DC12~30V		<div style="display: flex; flex-direction: column; align-items: center;"> <div style="display: flex; align-items: center; margin-bottom: 2px;">● R-Red</div> <div style="display: flex; align-items: center; margin-bottom: 2px;">● A-Amber</div> <div style="display: flex; align-items: center;">● G-Green</div> </div>