



ETR50L

## PRODUCT SPECIFICATION

ETR50L

**Materials** Housing-ABS, Lens-PC**Ambient operating temperature** -25°C to +55°C**Volume** Max. 85dB at 1m**Protection rating** IP65/IP54

- 50mm outer diameter LED lighting economic tower lamp
- A soft and cozy signal light is emitted through the milky translucent lens
- Excellent long-distance visibility by using high-brightness LED light source
- Waterproof and dustproof cap that meets the IP65 degree of protection
- Equipped with a foldable bracket to respond to various external environments
- Buzzer type can be selected for lighting specifications




### ETR50L Industrial LED beacon

| Model number                             | Layers | Voltage | Current | Certificates | Weight | Color  |
|--|--------|---------|---------|--------------|--------|--|
| ETR50L<br>Steady                         |        |         |         |              |        |  |
| ETR50L-BZ<br>Steady w/built-in<br>buzzer | 3      | DC24V   | 55mA    | CE           | 0.42kg | <div>● R-Red</div> <div>● A-Amber</div> <div>● G-Green</div> |

### Technical Diagram

Units: mm


#### • ETR50L / ETR50L-BZ

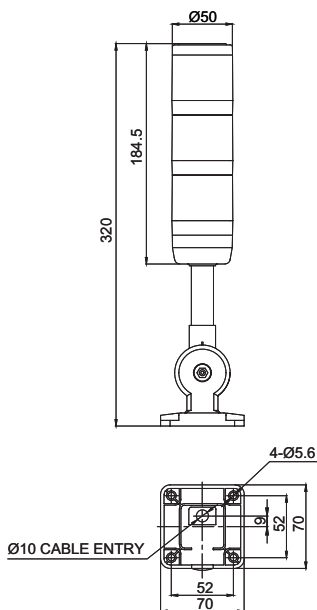

### Wiring Instructions

- ETR50L series can be wired by using both external contact and transistor.
- Wiring to transistor, use the PNP transistor. Please wire properly based on wiring instructions.

#### • ETR50L / ETR50L-BZ

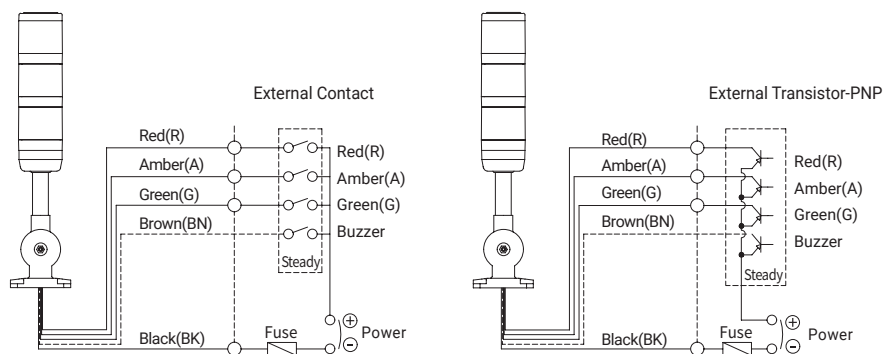

※ ETR50L / ETR50L-BZ: Steady, ETR50LF / ETR50LF-BZ: Flashing

### Ordering Specification

|                     |   |           |   |  |
|---------------------|---|-----------|---|--|
| ETR50L              | - | 24        | - | RAG  |
| [Model number]      |   | [Voltage] |   | [Color]  |
| ETR50L<br>ETR50L-BZ |   | 24-DC24V  |   | <div>● R-Red</div> <div>● A-Amber</div> <div>● G-Green</div> |