

ST45L / ST56L / ST80L Series

Universal LED tower light with a wide selection of audio and visual signaling options according to the application environment and intended use



PRODUCT SPECIFICATION

STL Series

Materials Lens-AS, Housing-ABS, Pole-Al

Ambient operating temperature -30°C to + 60°C

Volume

Max.90dB at 1m

Max.85dB at 1m(Speaker output type, Based on WA-Ch1)

Protection rating Standard type-IP44, Built-in buzzer type-IP23

Flashing rate 60-80/min

Compliant with RoHS directive

- LED steady/flashing tower lights
- Long product lifetime of over 20,000hours with the application of a high intensity LED light source
- Can select from size selections of Ø45mm, Ø56mm, and Ø80mm to fit your sophisticated application needs
- A variety of Mounting bracket selections for the pole mount type to fit your location and mounting needs
- Built-in alarm available: Can select from 5 warning sounds, 5 alarms, 5 melodies to fit your application needs
- Customized color arrangement available (LED light distribution system and lens is integrated into a combined structure)
- Standard model and built-in buzzer model can be used by selecting the specifications suitable for the operating environment

1 Different sizes of LED steady/flashing lenses

- You can select from a variety of indicators depending on the working environment and application needs.

Model number	Lens diameter	Lens length
ST45(M)L	45mm	40mm
ST45(M)LF	45mm	40mm
ST56(M)EL	56mm	40mm
ST56(M)ELF	56mm	40mm
ST56(M)L	56mm	70mm
ST56(M)LF	56mm	70mm
ST80(M)EL	80mm	40mm
ST80(M)ELF	80mm	40mm
ST80(M)L	80mm	70mm
ST80(M)LF	80mm	70mm

2 Buzzer and sound patterns with 15 different tones

- Concrete messages can be clearly conveyed with the option of 15 types of audible signals.


Main	Built-in sound	Channel	Sound
BZ	1 buzzer sound 2 buzzer sound	-	※ Customized 2 tone Buzzer available
WS	5 Warning sounds	Ch1 Ch2 Ch3 Ch4 Ch5	Fire.A-ANG Emergency Ambulance Machinery Fault High Expansion
WM	5 Melodies	Ch1 Ch2 Ch3 Ch4 Ch5	Sweet Home For Elise Cuckoo's Waltz Piano Sonata Turkish March
WA	5 Alarms	Ch1 Ch2 Ch3 Ch4 Ch5	Beep Intermittent Door Chime Phone Ring PI.PI.PI Short Tripping Beat

3 A variety of Mounting bracket selection

- Wall mount type model allows for contained and tidy wiring with no exposed wires
- A number of pole mounting stands are available for a variety of environments depending on location and mounting needs
- Specifically, the QL-type and SL-type tower lights can be applied in a variety of environments as it can be folded up to 90 degrees in the horizontal direction. These products can avoid damage due to external forces when movement of the equipment is required

·Wall mount bracket

TWS45 TWS80 TWA45 TWA80



Steel

PC

·Pole Mount Brackets

Standard LB18 LB24 LW18 LW24 QZ18 QZ24 SZ18 SZ24 QL18 QL24 SL18 SL24



Steel

Steel

ABS

ABS

Al


ABS

Al

※ Please refer to [Tower Light Mounting bracket] on this catalogue for detailed dimensions


Interchangeable Lens Concept

STL Series product allows for the lens arrangement to be adjusted after removing the bolt that secures the cover. If additional lenses are required for this product please reach out to us. ST45L / ST56L / ST80L series can be stacked up to 5 layers.

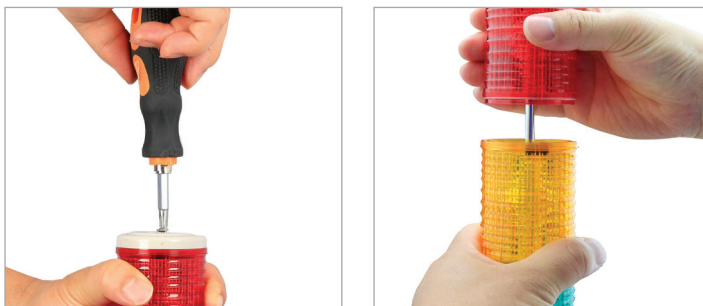





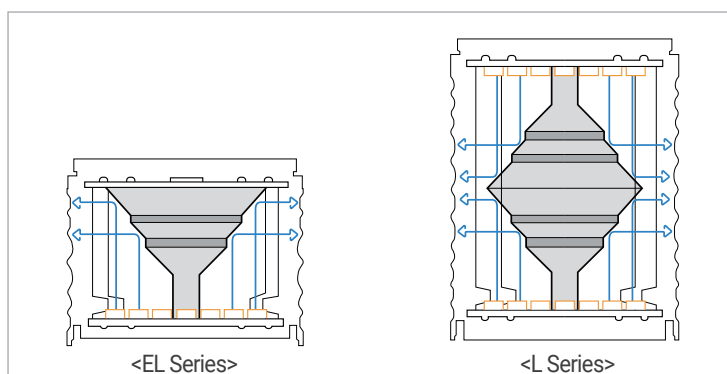

Reflection System

- Qlight's special light distribution system with multi-tiered reflector provides linear and balanced light transmission to the lens for strong LED illumination throughout the product
- The special light diffusion structure inside the product creates the brightest signal light at the center of the lens



References

Mount bracket	Sound	Buzzer and sound patterns	Lens dimension				
			Ø45mm H40mm	Ø56mm H40mm	Ø56mm H70mm	Ø80mm H40mm	Ø80mm H70mm
 Direct mount	No sound	Standard	ST45ML(F)	ST56MEL(F)	ST56ML(F)	ST80MEL(F)	ST80ML(F)
		Built-in buzzer	ST45ML(F)-BZ	ST56MEL(F)-BZ	ST56ML(F)-BZ	ST80MEL(F)-BZ	ST80ML(F)-BZ
		5 Warning sounds	ST45ML(F)-WS	ST56MEL(F)-WS	ST56ML(F)-WS	ST80MEL(F)-WS	ST80ML(F)-WS
		5 Melodies	ST45ML(F)-WM	ST56MEL(F)-WM	ST56ML(F)-WM	ST80MEL(F)-WM	ST80ML(F)-WM
		5 Alarms	ST45ML(F)-WA	ST56MEL(F)-WA	ST56ML(F)-WA	ST80MEL(F)-WA	ST80ML(F)-WA
 Pole mount	No sound	Standard	ST45L(F)	ST56EL(F)	ST56L(F)	ST80EL(F)	ST80L(F)
		Built-in buzzer	ST45L(F)-BZ	ST56EL(F)-BZ	ST56L(F)-BZ	ST80EL(F)-BZ	ST80L(F)-BZ
		5 Warning sounds	ST45L(F)-WS	ST56EL(F)-WS	ST56L(F)-WS	ST80EL(F)-WS	ST80L(F)-WS
		5 Melodies	ST45L(F)-WM	ST56EL(F)-WM	ST56L(F)-WM	ST80EL(F)-WM	ST80L(F)-WM
		5 Alarms	ST45L(F)-WA	ST56EL(F)-WA	ST56L(F)-WA	ST80EL(F)-WA	ST80L(F)-WA

Ø80mm LED Steady/Flashing Tower Lights

ST80MEL



ST80MEL Ø80mm Direct mount, LED Steady/Flashing

Model number	Layers	Voltage	Certificates	Weight	Color
ST80MEL Steady	1	AC/DC12V		0.36kg	R-Red
ST80MEL-BZ Steady w/built-in buzzer		AC/DC24V		0.36kg	
ST80MEL-WS Steady/5 Warning sounds		AC110V		0.59kg	
ST80MEL-WM Steady/5 Melodies	2	AC/DC12V		0.45kg	R-Red
ST80MEL-WA Steady/5 Alarms		AC/DC24V		0.45kg	
ST80MELF Steady/Flashing		AC110V		0.68kg	
ST80MELF-BZ Steady/Flashing w/built-in buzzer	3	AC/DC12V	CE UL	0.55kg	R-Red
ST80MELF-WS Steady/Flashing/5 Warning sounds		AC/DC24V		0.55kg	
ST80MELF-WM Steady/Flashing/5 Melodies		AC110V		0.76kg	
ST80MELF-WA Steady/Flashing/5 Alarms	4	AC/DC12V		0.64kg	R-Red
ST80MELF-BZ Steady/Flashing w/built-in buzzer		AC/DC24V		0.64kg	
ST80MELF-WS Steady/Flashing/5 Warning sounds		AC110V		0.87kg	
ST80MELF-WM Steady/Flashing/5 Melodies	5	AC/DC12V		0.73kg	R-Red
ST80MELF-BZ Steady/Flashing w/built-in buzzer		AC/DC24V		0.73kg	
ST80MELF-WS Steady/Flashing/5 Warning sounds		AC110V		0.96kg	
ST80MELF-WA Steady/Flashing/5 Alarms		AC220V		0.96kg	W-White

※ CE Compliant: DC12V, DC24V(Except sound types)

※ UL Listed: DC24V(Except sound types)



ST80MEL Series

Built-in buzzer output holes formed on the housing of the product




Light source/buzzer current(based on 1 layer)

Voltage	AC/DC12V	AC/DC24V	AC110V	AC220V
Light source current(1 layer)	80mA	60mA	50mA	40mA
Buzzer current	40mA	75mA	50mA	40mA
Signal sound current	200mA(DC12V)	135mA(DC24V)	50mA	35mA

Customization

- AC type each layer power provided(same wiring DC steady)
- DC24V voltage UL listed product
- 2 buzzer sound types : Both prolonged (beep, beep) and staccato (beep, beep, beep)buzzer output available
- Wall mount bracket options : Bracket structure allows for threading through the bracket hole or into the wall



Wall mount bracket TWS80



Wall mount bracket TWA80

Ordering Specifications

ST80MEL	-	3	-	24	-	RAG
[Model number]		[Layers]		[Voltage]		[Color]
ST80MEL		1-1 Layers		12-DC12V		R-Red
ST80MEL-BZ		2-2 Layers		24-DC24V		A-Amber
ST80MEL-WS		3-3 Layers		110-AC110V		G-Green
ST80MEL-WM		4-4 Layers		220-AC220V		B-Blue
ST80MEL-WA		5-5 Layers				W-White
ST80MELF						
ST80MELF-BZ						
ST80MELF-WS						
ST80MELF-WM						
ST80MELF-WA						

Ø80mm LED Steady/Flashing Tower Lights

ST80EL



ST80EL Series

Built-in buzzer output holes formed on the housing of the product



ST80EL Ø80mm Pole mount, LED Steady/Flashing

Model number	Layers	Voltage	Certificates	Weight	Color
ST80EL Steady	1	AC/DC12V		0.58kg	● R-Red
ST80EL-BZ Steady w/built-in buzzer		AC/DC24V		0.58kg	
		AC110V		0.81kg	
		AC220V		0.81kg	
ST80EL-WS Steady/5 Warning sounds	2	AC/DC12V		0.67kg	● R-Red ● G-Green
ST80EL-WM Steady/5 Melodies		AC/DC24V		0.67kg	
ST80EL-WA Steady/5 Alarms		AC110V		0.91kg	
ST80ELF Steady/Flashing		AC220V		0.91kg	
ST80ELF-BZ Steady/Flashing w/ built-in buzzer	3	AC/DC12V	CE UL	0.77kg	● R-Red ● A-Amber ● G-Green
ST80ELF-WS Steady/Flashing/5 Warning sounds		AC/DC24V		0.77kg	
ST80ELF-WM Steady/Flashing/5 Melodies		AC110V		1.00kg	
ST80ELF-WA Steady/Flashing/5 Alarms		AC220V		1.00kg	
ST80ELF-BZ Steady/Flashing w/ built-in buzzer	4	AC/DC12V		0.86kg	● R-Red ● A-Amber ● G-Green ● B-Blue
ST80ELF-WS Steady/Flashing/5 Warning sounds		AC/DC24V		0.86kg	
ST80ELF-WM Steady/Flashing/5 Melodies		AC110V		1.09kg	
ST80ELF-WA Steady/Flashing/5 Alarms		AC220V		1.09kg	
ST80ELF-BZ Steady/Flashing w/ built-in buzzer	5	AC/DC12V		0.95kg	● R-Red ● A-Amber ● G-Green ● B-Blue ○ W-White
ST80ELF-WS Steady/Flashing/5 Warning sounds		AC/DC24V		0.95kg	
ST80ELF-WM Steady/Flashing/5 Melodies		AC110V		1.19kg	
ST80ELF-WA Steady/Flashing/5 Alarms		AC220V		1.19kg	

※ CE Compliant: DC12V, DC24V(Except sound types)

※ UL Listed: DC24V(Except sound types)

Light source/buzzer current(based on 1 layer)

Voltage	AC/DC12V	AC/DC24V	AC110V	AC220V
Light source current(1 layer)	80mA	60mA	50mA	40mA
Buzzer current	40mA	75mA	50mA	40mA
Signal sound current	200mA(DC12V)	135mA(DC24V)	50mA	35mA

Mounting bracket

Standard	LB24	LW24	QZ24	SZ24	QL24	SL24
Steel	Steel	ABS	ABS	Al	ABS	Al

※ Please refer to [Tower Light Mounting bracket] on this catalogue for detailed dimensions

Customization

- 2 buzzer sound types : Both prolonged (beep, beep) and staccato (beep, beep, beep) buzzer output available
- AC type each layer power provided (same wiring DC steady)
- DC24V voltage UL listed product
- Customized pole length available

Ordering Specifications


ST80EL	-	3	-	220	-	RAG	-	LW24
[Model number]		[Layers]		[Voltage]		[Color]		[Bracket]
ST80EL		1-1 Layers		12-DC12V		● R-Red		· None-Standard
ST80EL-BZ		2-2 Layers		24-DC24V		● A-Amber		· Bracket
ST80EL-WS		3-3 Layers		110-AC110V		● G-Green		· LB24 -LW24
ST80EL-WM		4-4 Layers		220-AC220V		● B-Blue		· QZ24 -SZ24
ST80EL-WA		5-5 Layers				○ W-White		· QL24 -SL24
ST80ELF								
ST80ELF-BZ								
ST80ELF-WS								
ST80ELF-WM								
ST80ELF-WA								

ST80MEL / ST80EL

Technical Diagram

Units : mm

·ST80MEL-AC/DC
·ST80MELF-AC/DC




LAYER	L
1	150
2	190
3	230
4	270
5	310



·ST80MEL-BZ-AC/DC
·ST80MELF-BZ-AC/DC


·ST80MEL-W□
·ST80MELF-W□



LAYER	L
1	230
2	270
3	310
4	350
5	390



·ST80EL-AC/DC
·ST80ELF-AC/DC




LAYER	L
1	287
2	327
3	367
4	407
5	447



·ST80EL-BZ-AC/DC
·ST80ELF-BZ-AC/DC

·ST80EL-W□
·ST80ELF-W□



LAYER	L
1	367
2	407
3	447
4	487
5	527

M24x1.5 THREAD

Wiring Instructions

- DC steady type cable specification: External power line/External signal line UL1007 AWG22(0.3sq) 400mm
- AC steady, AC/DC steady/flashing type cable specification: External power line UL1015 AWG18(0.75sq) x 2C 400mm
External signal line UL1007 AWG22(0.3sq) 400mm
- LED tower light can be wired by using transistor and External Contact


ST45L / ST56L / ST80L Series

Wiring Instructions


- In case of wiring with External Contacts, refer to the wiring diagrams below according to your product's type and voltage setting.
- Customized AC each layer power supply type wiring is same as DC steady type.

Wiring Instructions


DC Steady

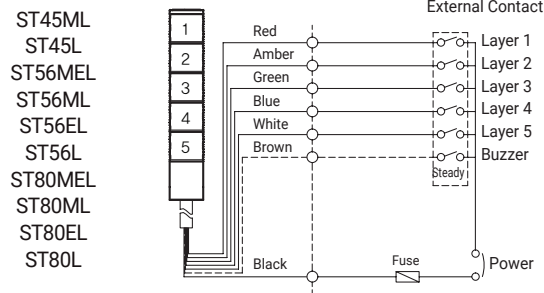


AC Steady

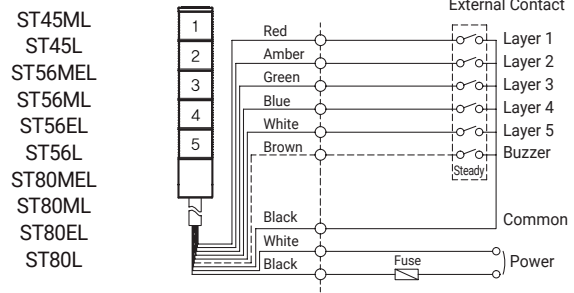


DC Steady/ Flashing

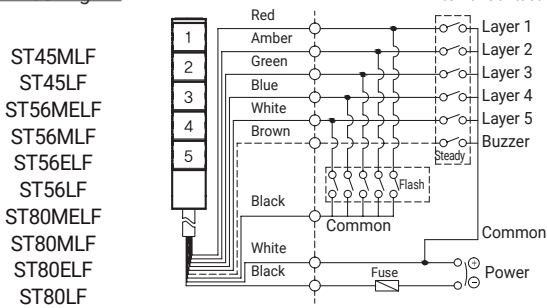


AC Steady/ Flashing

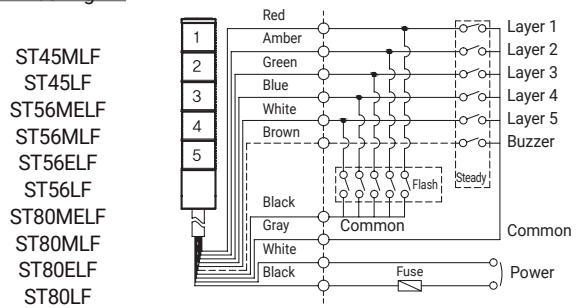

DC/AC Steady Built-in Signal Sound

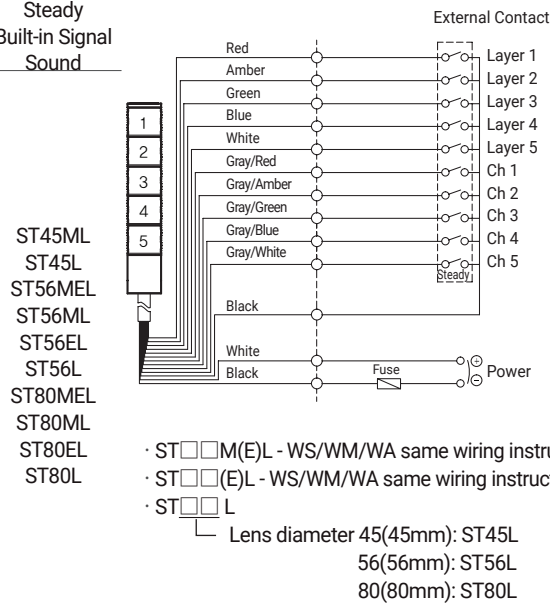

DC/AC Steady/ Flashing Built-in Signal Sound

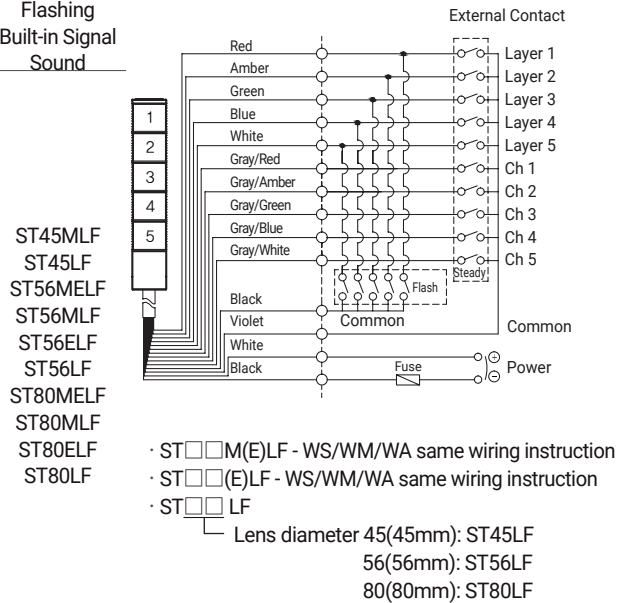

- DC steady type cable specification: External power line/External signal line UL1007 AWG22(0.3sq) 400mm
- AC steady, AC/DC steady/flashing type cable specification: External power line UL1015 AWG18(0.75sq) x 2C 400mm
External signal line UL1007 AWG22(0.3sq) 400mm

ST45L / ST56L / ST80L Series



Wiring Instructions

· In case of wiring by transistor, please make sure if it is NPN type or PNP type. Please carefully follow wiring instruction below.

Wiring Instructions


DC Steady

ST45ML
ST45L
ST56MEL
ST56ML
ST56EL
ST56L
ST80MEL
ST80ML
ST80EL
ST80L

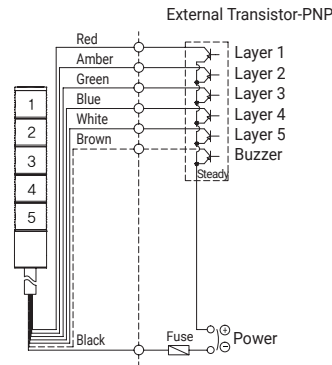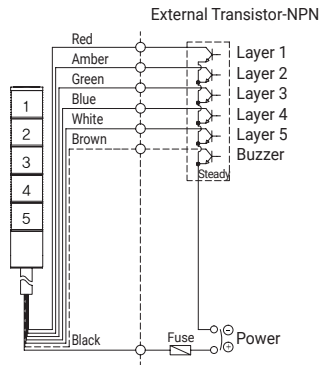


DC Steady/ Flashing

ST45MLF
ST45LF
ST56MLF
ST56MLF
ST56ELF
ST56LF
ST80MLF
ST80MLF
ST80ELF
ST80LF

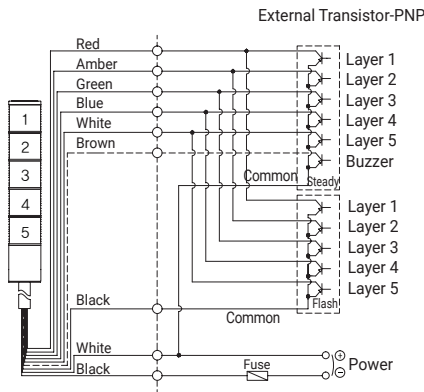


AC Steady/ Flashing

ST45MLF
ST45LF
ST56MLF
ST56MLF
ST56ELF
ST56LF
ST80MLF
ST80MLF
ST80ELF
ST80LF

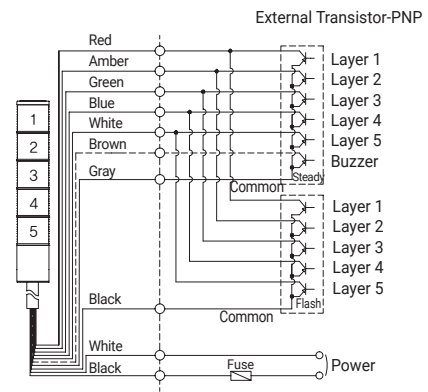

DC/AC Steady Built-in Signal Sound

ST45ML
ST45L
ST56MEL
ST56ML
ST56EL
ST56L
ST80MEL
ST80ML
ST80EL
ST80L

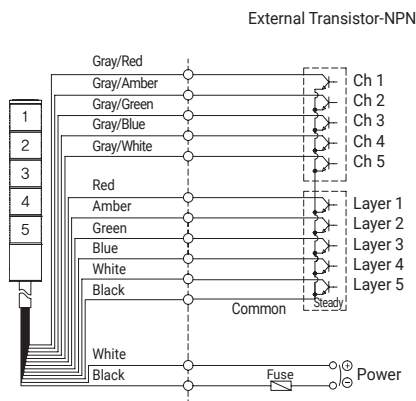


· ST□□M(E)L - WS/WM/WA same wiring instruction
· ST□□(E)L - WS/WM/WA same wiring instruction
· ST□□L

Lens diameter 45(45mm): ST45L
56(56mm): ST56L
80(80mm): ST80L

DC/AC Steady/ Flashing Built-in Signal Sound

ST45MLF
ST45LF
ST56MLF
ST56MLF
ST56ELF
ST56LF
ST80MLF
ST80MLF
ST80ELF
ST80LF

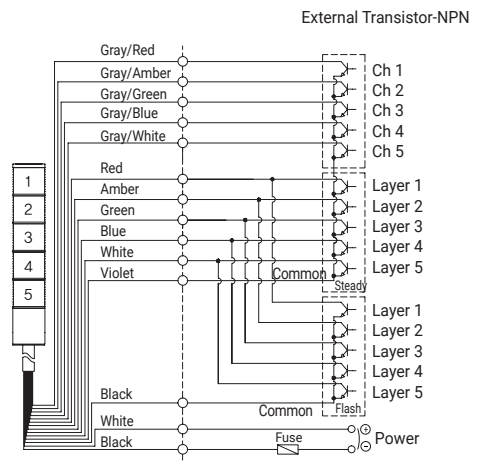

· ST□□M(E)L - WS/WM/WA same wiring instruction
· ST□□(E)L - WS/WM/WA same wiring instruction
· ST□□L

Lens diameter 45(45mm): ST45L
56(56mm): ST56L
80(80mm): ST80L

· DC steady type cable specification: External power line/External signal line UL1007 AWG22(0.3sq) 400mm

· AC steady, AC/DC steady/flashing type cable specification: External power line UL1015 AWG18(0.75sq) x 2C 400mm

External signal line UL1007 AWG22(0.3sq) 400mm