




MARK	DATE	REVISION	REVISER	APP. BY
①				
②				
③				

MODEL NO		QPL/QPLC			
MATERIAL		HEAT SINK-AL			
		LENS-PC			
		SIDE COVER-ABS			
MODEL		QPL-200/ QPLC-200	QPL-300/ QPLC-300	QPL-400/ QPLC-400	QPL-500/ QPLC-500
POWER CONSUMPTION	DC24V	3.5W	4W	5.5W	7.5W
	AC110V	-	3.5W	6W	9W
	AC220V	-	5.5W	7.5W	11W
LED		CHIP LED			
PROTECTION GRADE		WATER & DUST PROOF IP65			

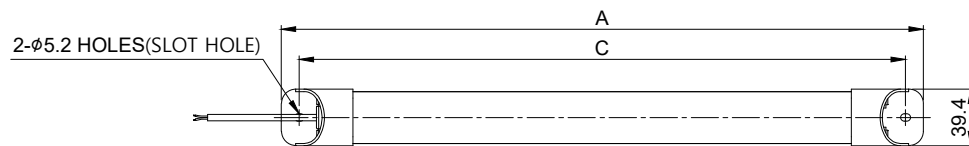

FITTING HOLES
(SCALE 5:1)

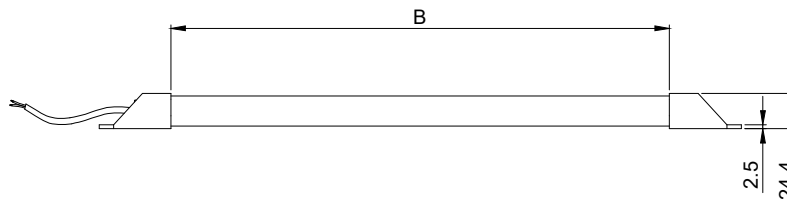



MODEL	A	B	C
QPL/QPLC-200	200	100	175
QPL/QPLC-300	300	200	275
QPL/QPLC-400	400	300	375
QPL/QPLC-500	500	400	475

※ POWER CABLE : DC TYPE - UL2464 AWG22(0.3sq X 2C) 450mm
AC TYPE - VCTFK (0.75sq X 2C) 450mm

ISO2768-1 : CLASS OF TOLERANCE					
FOR LINEAR DIMENSIONS	0.5~3	f	m	c	Ⓥ
	3~6	±0.05	±0.1	±0.2	-
	6~30	±0.1	±0.2	±0.3	±0.5
	30~120	±0.15	±0.3	±0.5	±1
	120~400	±0.15	±0.3	±0.8	±1.5
	400~1000	±0.2	±0.5	±1.2	±2.5
FOR ANGULAR DIMENSIONS	0~10	±0.3	±0.8	±2	±4
	10~50	±1°	±0°30'	±1°30'	±3°
	50~120	±1°	±0°30'	±1°	±2°
	120~400	±1°	±0°30'	±1°	±1°
	120~400	±0°10'	±0°13'	±0°13'	±0°30'

SURFACE
FINISH

-	-	-	-	1	-	
Nr.	DWG. NO.	TITLE/ NAME		MAT'L	QTY	REFERENCE
DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE	
C.S.GWAK	J.H.PARK		J.K.HAN	3	2021.07.27	
TITLE			MODEL			
QPL/QPLC OUTLINE DRAWING			QPL/QPLC			
			DWG. NO.			
			QPL/QPLC_OUT			
SCALE		SIZE	REV	SHEET		
1/1		A4	00	1/1		

A4(297X210)