

S125 Series



PRODUCT SPECIFICATION

S125LR | S125MLR

Materials Lens-AS, Housing-ABS
Reflector-Heat resistant ABS
Ambient operating temperature -20°C to +50°C
Volume Max.90dB at 1m
Protection rating IP44, IP54
Revolving speed 120-140RPM
Compliant with RoHS directive

- Ø125mm standard LED revolving warning lights
- Excellent omni-directional visibility with LED light collecting system and special multifaceted reflector
- Can select between standard and built-in buzzer type depending on installation environment

S125LR LED Revolving Warning Lights


Model number	Voltage	Current	Certificates	Weight	Color
S125LR	DC12V	420mA	-	0.43kg	● R-Red
	DC24V	265mA		0.43kg	● A-Amber
	AC110V	80mA		0.66kg	● G-Green
	AC220V	45mA		0.66kg	● B-Blue

· Protection rating: IP44

Technical Diagram

Units: mm

·S125LR

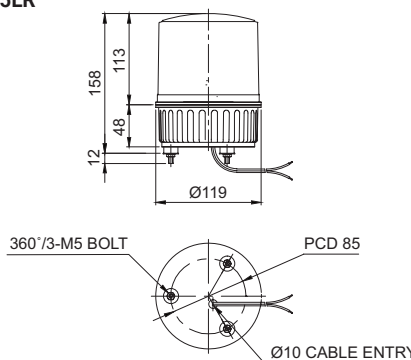

Customization

· 2 buzzer sound types: Both prolonged(beep, beep) and staccato(beep, beep, beep) buzzer output available

Same design with S125R
 (Model number: S125RLR)

Wall mount bracket options: Bracket structure allows for threading through the bracket hole or into the wall mount



S125RLR



Wall Mount Bracket
SWP125



Wall Mount Bracket
SWM125

Ordering Specification


S125LR	-	BZ	-	220	-	R
[Model number] S125LR		[Buzzer option] (None) - No buzzer BZ - Built-in buzzer		[Voltage] 12-DC12V 24-DC24V 110-AC110V 220-AC220V		[Color] ● R-Red ● A-Amber ● G-Green ● B-Blue



S125LR

Wiring Instructions

- External Power line
UL1015 AWG18(0.75sq) x 2C 400mm
- DC Type
: Black output line is negative(-)
- AC voltage switch built-in type:
AC110V and AC220V can be selected with a built-in 110/220V switch.



Feature of LED revolving warning lights

LED revolving warning lights has Qlight's distinctive LED light collecting system and special multifaceted reflector allowing excellent omni-directional visibility