


# LED Strobe Beacons for Heavy-Duty Equipment

## QA125HLS / QA125HLSP



Adopted Qlight's new developed light diffusion system.

### PRODUCT SPECIFICATION

QA125HLS | QA125HLSP

**Materials** Lens-PC, Housing-PC  
**Ambient operating temperature** -30°C to +50°C  
**Protection rating** IP66  
**Vibration resistant and shock-proof**  
 can withstand 15g of vibration and 50g of shock  
**Flashing rate** 60-80 flashes/min

- Ability to compensate for signal attenuation phenomenon that occurs during daytime operation with a powerful xenon lamp.
- Can select between pole mount and direct mount type to fit your application needs.



QA125HLS



QA125HLSP

### QA125HLS LED Strobe Beacons

Model number	Voltage	Current	Certificates	Weight	Color
QA125HLS	DC12V-24V	Max.1.65A	-	0.55kg	● R-Red ● A-Amber

· Flashing rate: 60-80 flashes/min, Outer diameter: 125mm

※ DC type model has a free-voltage range of 10V-30V.

### QA125HLSP LED Strobe Beacons


Model number	Voltage	Current	Certificates	Weight	Color
QA125HLSP	DC12V-24V	Max.1.65A	-	1.00kg	● R-Red ● A-Amber

· Flashing rate: 60-80 flashes/min, Outer diameter: 125mm

※ DC type model has a free-voltage range of 10V-30V.

### Technical Diagram

Units: mm

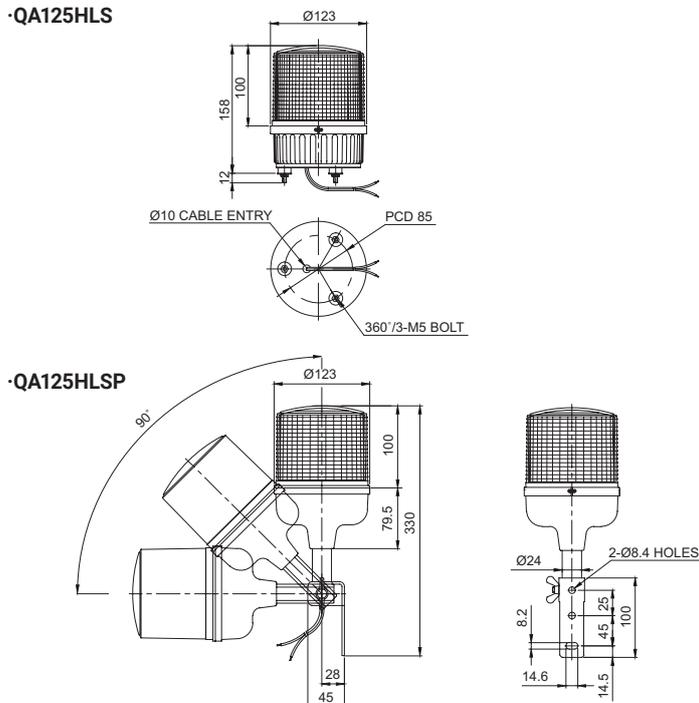

### Wiring Instructions

- External power line  
UL1015 AWG18(0.75sq) x 2C 400mm
- This product can be wired regardless of polarity.

### Ordering Specification

QA125HLS	-	12/24	-	R
[Model number]		[Voltage]		[Color]
QA125HLS QA125HLSP		12/24-DC12V-24V		● R-Red ● A-Amber