

Warning Lights for Road Safety (Max.126dB)

ELML

Various combinations of sizes, color, and light source depending on the application needs

PRODUCT SPECIFICATION

ELML



ELML

Materials Lens-PC, Speaker Cover-STS, Reflector-Heat resistant ABS, Board-Al
Ambient operating temperature -25°C to +50°C
Built-in speaker, volume Max.126dB at 1m
Protection rating IP56
Flashing rate 60-80/min

- Adjustable size depending on the type of vehicle and application needs
- Suitable for tow trucks, patrol cars and parking lots
- Adjustable size depending on the type of vehicle and application needs
- Suitable for tow trucks, patrol cars and parking lots
- Designed in a structure which allows for quick assembly and disassembly for convenient light source replacement
- Customized color arrangements available
- Modular design allows user defined color arrangement if necessary


ELML LED Strobe Warning Light Bar

Model number	LED module number	Voltage	Current	Certificate	Weight (Based on 3 layers)	Color
ELML-1	4EA	DC12V	1.6A	-	11.02kg	<div><div></div><div>B-R</div><div></div><div>R-R</div><div></div><div>A-A</div></div>
		DC24V	1.2A			
ELML-2	8EA	DC12V	2.4A			
		DC24V	1.65A			
ELML-3	12EA	DC12V	3.5A			
		DC24V	3A			
ELML-4	16EA	DC12V	5.1A			
		DC24V	4.2A			
ELML-5	20EA	DC12V	5.8A			
		DC24V	4.7A			

Technical Diagram

Units: mm

·ELML

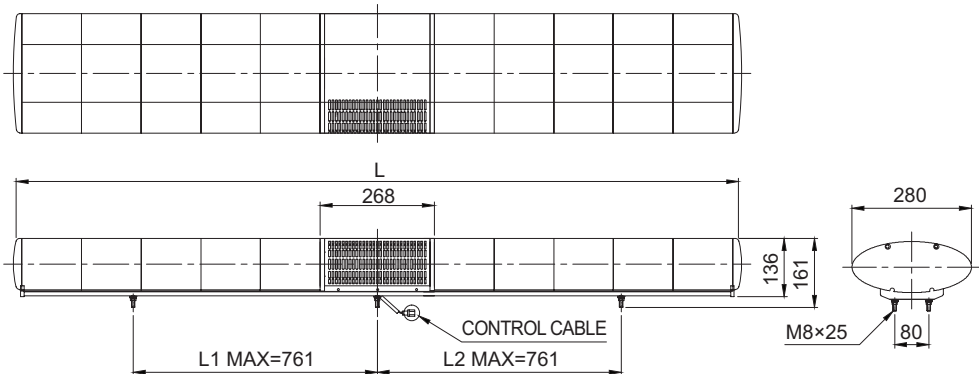


L(LENGTH)	
ELML-1(BLOCKS 2)	588mm
ELML-2(BLOCKS 4)	868mm
ELML-3(BLOCKS 6)	1148mm
ELML-4(BLOCKS 8)	1428mm
ELML-5(BLOCKS 10)	1708mm

· Power line specification ICE57(0.75sq) x 4C 3m

Wiring Instructions

•ELML-DC

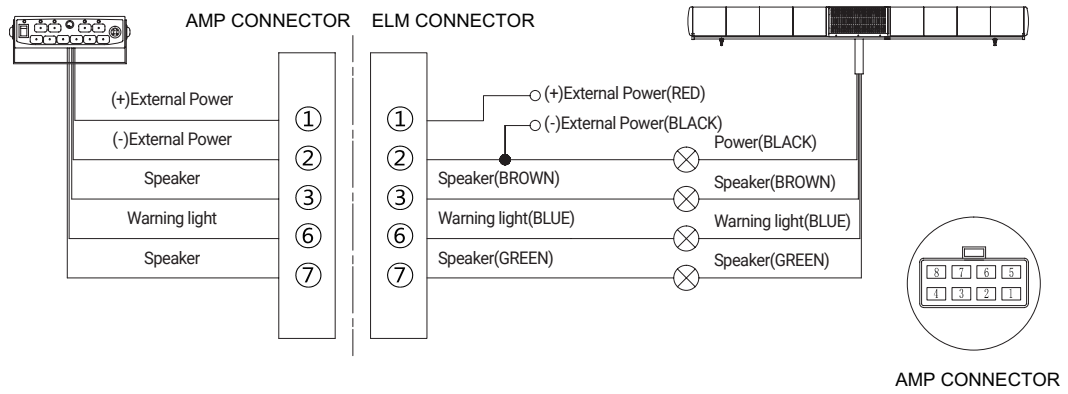

Ordering Specification

ELML	-	4	-	12	-	B/R	-	SAMP
[Model number]		[Layer]		[Voltage]		[Color]		[AMP]
ELML		1-1layer 2-2layers 3-3layers 4-4layers 5-5layers		12-DC12V 24-DC24V		B/R Blue-Red R/R Red-Red A/A Amber-Amber		None - No AMP SAMP - AMP included