



ETA50MCL

PRODUCT SPECIFICATION

ETA50MCL

Materials Housing-Al, Lens-PC**Ambient operating temperature** -25°C to +55°C**Volume** Max. 85dB at 1m**Protection rating** IP20

- Pole-mounted Performance Line adopting high-brightness LED as a light source
- It is easy to identify signal light by expressing red, amber, and green in one stage
- High visibility from a distance by using a transparent globe
- Excellent durability by using aluminum housing
- Equipped with a foldable bracket to respond to various external environments
- Buzzer type can be selected for lighting or blinking specifications


ETA50MCL Industrial LED beacon

Model number	Voltage	Current	Certificates	Weight	Color
ETA50MCL Steady	DC24V	85mA		0.55kg	<div style="display: flex; flex-direction: column; align-items: center;"> <div style="width: 10px; height: 10px; background-color: red; border-radius: 50%; margin-bottom: 5px;"></div> R-Red <div style="width: 10px; height: 10px; background-color: yellow; border-radius: 50%; margin-bottom: 5px;"></div> A-Amber <div style="width: 10px; height: 10px; background-color: green; border-radius: 50%;"></div> G-Green </div>
ETA50MCL-BZ Steady w/built-in buzzer					
ETA50MCLF Flashing					
ETA50MCLF-BZ Flashing w/built-in buzzer					

Technical Diagram

Units: mm



- ETA50MCL / ETA50MCL-BZ
- ETA50MCLF / ETA50MCLF-BZ

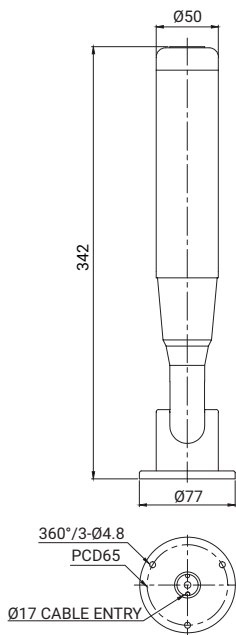

Wiring Instructions

- ETA50MCL series can be wired by using both external contact and transistor.
- Wiring to transistor, use the PNP transistor. Please wire properly based on wiring instructions.

- ETA50MCL / ETA50MCL-BZ
- ETA50MCLF / ETA50MCLF-BZ

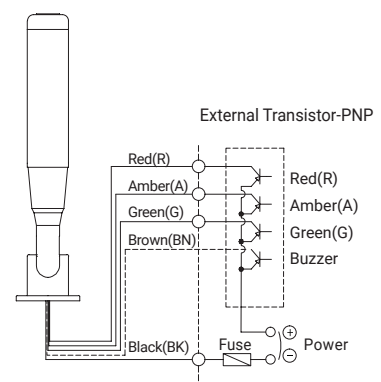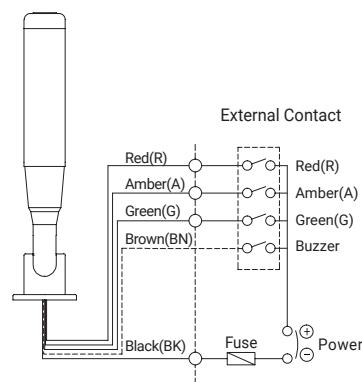

※ ETA50MCL / ETA50MCL-BZ: Steady, ETA50MCLF / ETA50MCLF-BZ: Flashing

Ordering Specification

ETA50MCL	-	24	-	RAG
[Model number] ETA50MCL ETA50MCL-BZ ETA50MCLF ETA50MCLF-BZ		[Voltage] 24-DC24V		[Color] <div style="display: flex; flex-direction: column; align-items: center;"> <div style="width: 10px; height: 10px; background-color: red; border-radius: 50%; margin-bottom: 5px;"></div> R-Red <div style="width: 10px; height: 10px; background-color: yellow; border-radius: 50%; margin-bottom: 5px;"></div> A-Amber <div style="width: 10px; height: 10px; background-color: green; border-radius: 50%;"></div> G-Green </div>

Customization

- NPN type