


Low Intensity LED Aviation Obstruction Light

SAOL2



Applied on tall structures for collision avoidance measures and airport runway safety

PRODUCT SPECIFICATION

SAOL2 | SAOL2P

ICAO standard Low intensity A type
Materials Lens-PC, Housing-Al, Bracket-STS316L, Pole-STS
Ambient operating temperature -30°C to +50°C
Protection rating IP66
Standard housing color Red
Cable entry 1/2" PF, Ø20
Light source High intensity light emitting diodes(LED)
Light color Red
Luminous intensity 19cd ±25%
Light function Steady



SAOL2



SAOL2P


SAOL2 / SAOL2P Low Intensity LED Aviation Obstruction Light

Model number	Voltage	Power consumption	Certificate	Weight	Light color
SAOL2	DC12V DC24V	Max.24W		1.02Kg	● Red
SAOL2P	AC110V-220V		CE	1.58Kg	

※ ICAO standard: DC24V, AC110V-220V

Technical Diagram

Units: mm

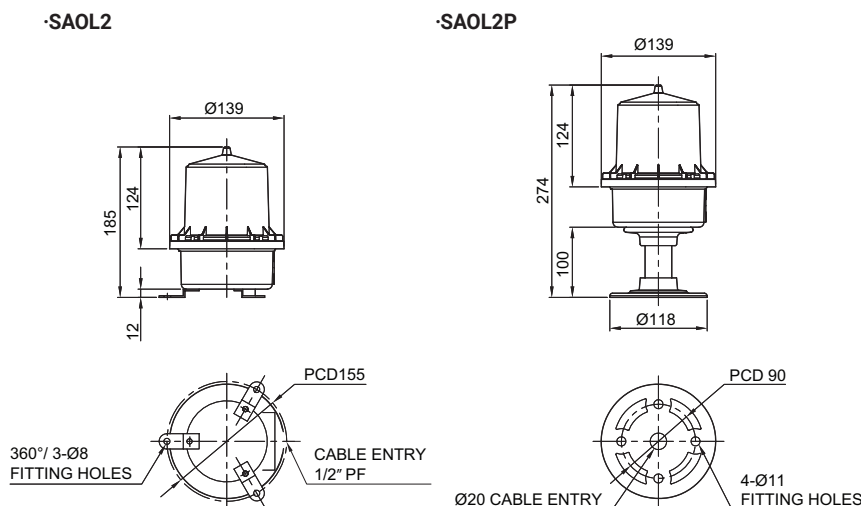

Wire is not exposed outside in the pole mount model.

Customization

- Built-in darkness detecting sensor available
- Amber housing, mounting bracket is available upon request

Ordering Specification

SAOL2	-	24	-	R
[Model number]		[Voltage]		[Color]
SAOL2		12-DC12V		● R-Red
SAOL2P		24-DC24V		
		110/220-AC110V-220V		