

1

2

3



4

5

6

MARK	DATE	REVISION	REVISER	APP.BY
①				
②				
③				

MODEL NO		QWL40	
MATERIAL		BODY-AL	
		LENS-PC	
		BRACKET-SUS	
COLOR OF LENS		TRANSLUCENT	
USE VOLT.	POWER CONSUMPTION	DC12V~24V	MAX. 40W
PROTECTION GRADE		WATER & DUST PROOF IP67	
CABLE ENTRY		DT04-2S CONNECTOR	

A

A

B




C

C

D

D

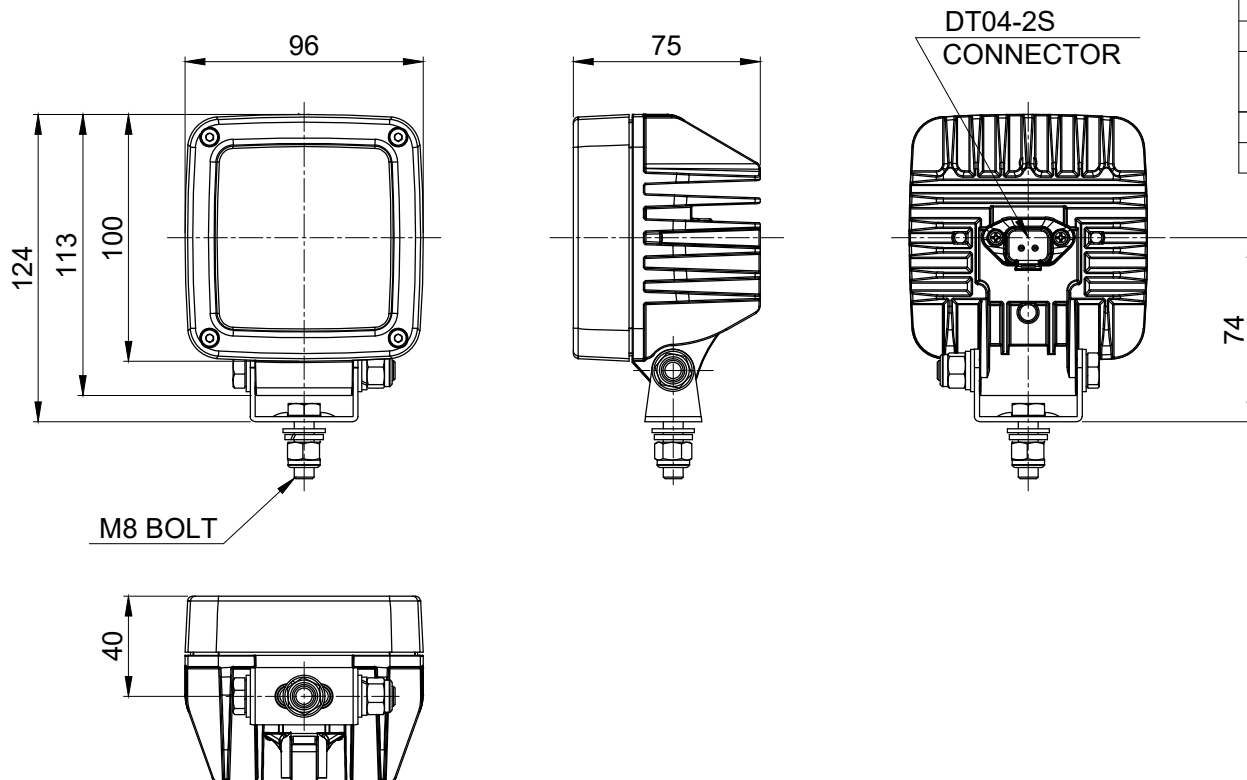

ISO2768-1 : CLASS OF TOLERANCE					
FOR LINEAR DIMENSIONS	0.5~3	f ±0.05	m ±0.1	⊙ ±0.2	v -
	3~6			±0.3	±0.5
	6~30	±0.1	±0.2	±0.5	±1
	30~120	±0.15	±0.3	±0.8	±1.5
	120~400	±0.2	±0.5	±1.2	±2.5
	400~1000	±0.3	±0.8	±2	±4
FOR ANGULAR DIMENSIONS	0~10	±1°		±1°30'	±3°
	10~50	±0°30'		±1°	±2°
	50~120	±0°20'		±0°30'	±1°
	120~400	±0°10'		±0°13'	±0°30'

SURFACE FINISH

-	-	-	-	1	-
Nr.	DWG. NO.	TITLE/ NAME		MAT'L	REFERENCE
DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE
J.Y.KIM	J.I.BAE		J.K.HAN	3	2024.01.15
TITLE			MODEL	QWL40	
QWL40 OUTLINE DRAWING			DWG. NO.	QWL40_OUT	
SCALE		SIZE	REV	SHEET	
N/S		A4	00	1/1	

A4(297X210)