

A

B

C


D

A


B

C

D

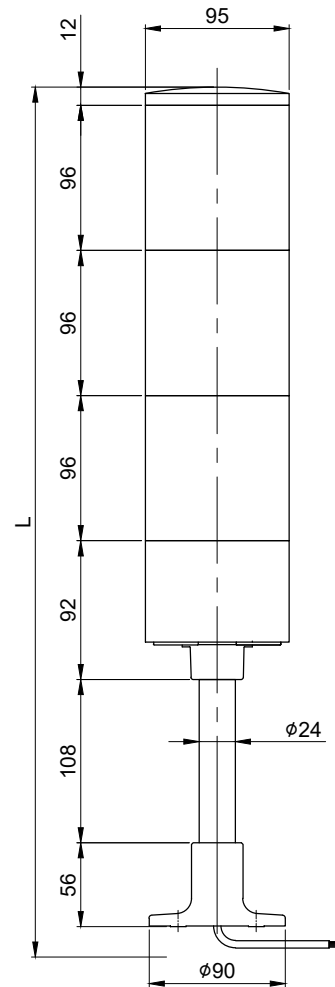

LAYER	L
1	364
2	460
3	556

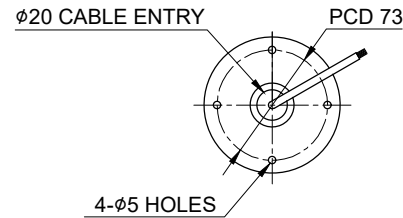

MARK	DATE	REVISION	REVISER	APP. BY
1				
2				
3				

MODEL NO			SJLP			
MATERIAL			HOUSING-ABS			
			LENS-AS			
			REFLECTOR-HEAT RESISTING ABS			
COLOR OF LENS			RED(), AMBER(), GREEN()			
FLASHING PER MIN.			60 ~ 80			
USE VOLT.	LED	CURRENT	DC12V	0.08W	MAX. 0.185A	LAYER1
			DC24V			LAYER1
			AC110V		0.065A	LAYER1
			AC220V		0.030A	LAYER1
VOLUME			MAX. 90dB at 1m			
PROTECTION GRADE			WATER & DUST PROOF IP44			
CABLE ENTRY			ø20 LEAD HOLE			
COLOR OF HOUSING			MAKER STANDARD			
ACTION			LED STEADY/FLASHING SIGNAL TOWERS			

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH		-	-	-	-	1	-
FOR LINEAR DIMENSIONS	0.5~3	±0.05	±0.1	±0.2	-			Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QTY	REFERENCE
	3~6	±0.05	±0.1	±0.3	±0.5			DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE
	6~30	±0.1	±0.2	±0.5	±1			S.H.KIM	J.H.PARK	J.K.HAN	J.K.HAN	3	2019.03.20
	30~120	±0.15	±0.3	±0.8	±1.5			TITLE SJLP OUTLINE DRAWING					
	120~400	±0.2	±0.5	±1.2	±2.5			MODEL SJLP					
	400~1000	±0.3	±0.8	±2	±4			DWG. NO. SJLP_OUT					
FOR ANGULAR DIMENSIONS	0~10	±1°	±1°30'	±3°				SCALE N/S					
	10~50	±0°30'	±1°	±2°				SIZE A4					
	50~120	±0°20'	±0°30'	±1°				REV 00					
	120~400	±0°10'	±0°13'	±0°30'				SHEET 1/1					

A4(297X210)