

PRODUCT SPECIFICATION

S100S | S100SM

Materials Lens-AS, Housing-ABS
Ambient operating temperature -30°C to +50°C
Protection rating IP54
Flashing rate 60-80/min

- Ø100mm xenon lamp strobe signal lights
- It has high instantaneous luminous efficiency and emits signal light close to natural light, providing excellent long-distance visibility
- Lamp connector structure for convenient lamp replacement



S100S



S100SM

S100S Xenon Lamp Strobe Signal Lights

Model number	Voltage	Current	Xenon lamp			Certificates	Weight	Color
			Spec	Standard	Parts no			
S100S	DC12V	Max. 1.3A	200V -550V	EUB0641 -1A(G) U Type	48	CE	0.25kg	● R-Red ● A-Amber ● G-Green ● B-Blue
	-24V							
	AC110V	160mA						
	AC220V	140mA						

※ CE Compliant: DC12V-24V

S100SM Xenon Lamp Strobe Light Equipped with Magnet


Model number	Voltage	Current	Xenon lamp			Certificates	Weight	Color
			Spec	Standard	Parts no			
S100SM	DC12V	Max. 1.3A	200V -550V	EUB0641 -1A(G) U Type	48	CE	0.34kg	● R-Red ● A-Amber ● G-Green ● B-Blue
	-24V							

Wiring Instructions

- External Power line(S100S) - UL1015 AWG18(0.75sq) x 2C 400mm
- External Power line(S100SM) - Cigarette lighter plug, IEC42(0.75sq) x 2P 2m
- This product can be wired regardless of polarity.


Technical Diagram

Units: mm

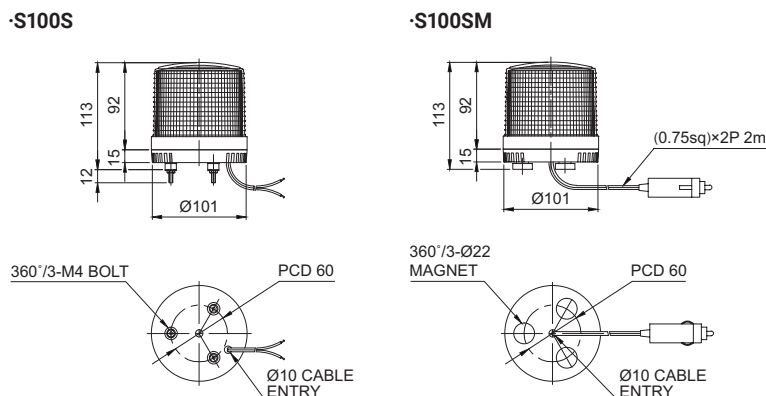

Ordering Specification

S100S	-	220	-	R
[Model number]		[Voltage]		[Color]
S100S S100SM		12/24-DC12V-24V 110-AC110V 220-AC220V		● R-Red ● A-Amber ● G-Green ● B-Blue

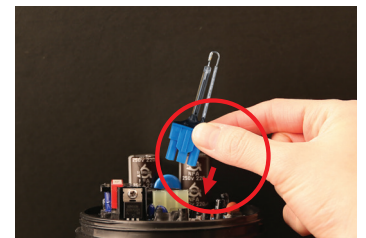

Xenon lamp replacement instructions

Convenient lamp replacement with connector lamp type. Lamp replacement is safe after the product is Powered off for 30 mins.

Customization

- AC Type(S100SM)
- Wall mount bracket options(S100S)
- Bracket structure allows for threading through the bracket hole or into the wall mount



Wall Mount Bracket SWP125



Wall Mount Bracket SWM125