


CABLE ENTRY 1/2" NPT

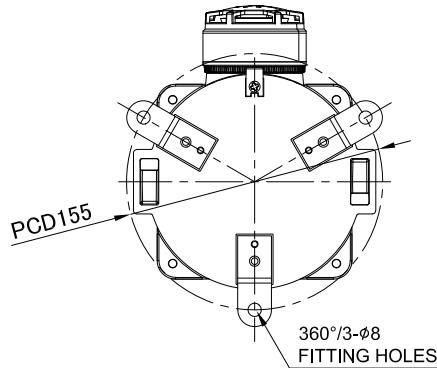

MARK	DATE	REVISION	REVISER	APP .BY
1				
2				
3				

MODEL NO			QNEB			
MATERIAL			HOUSING-AL			
			LENS-TEMPERED GLASS			
			PROTECTION CAGE-SUS316L			
COLOR OF LENS			RED(), AMBER(), GREEN(), BLUE()			
FLASHING PER MIN.			FLASHING - 60~80			
			LED STROBE - 70~80			
			LED ROTATE - 60~80			
USE VOLT.	LED	CURRENT	DC12~24V	0.2W	MAX. 0.380A	
			AC110~230V		MAX. 0.170A	
SOUND		BUZZER	Warning Sound			
VOLUME		MAX. 100dB at 1m				
PROTECTION GRADE		WATER & DUST PROOF IP66				
CABLE ENTRY		1/2" NPT				
COLOR OF HOUSING		RED				
ACTION		LED STEADY / FLASHING / STROBE / ROTATE				

ISO2768-1 : CLASS OF TOLERANCE					
FOR LINEAR DIMENSIONS	0.5~3	f	m	Ⓢ	v
	3~6	±0.05	±0.1	±0.2	-
	6~30	±0.1	±0.2	±0.3	±0.5
	30~120	±0.15	±0.3	±0.5	±1
	120~400	±0.2	±0.5	±0.8	±1.5
	400~1000	±0.3	±0.8	±1.2	±2.5
FOR ANGULAR DIMENSIONS	0~10	±1°	±1°30'	±1°	±3°
	10~50	±0°30'	±1°	±1°	±2°
	50~120	±0°20'	±0°30'	±1°	±1°
	120~400	±0°10'	±0°13'	±0°30'	±0°30'

SURFACE FINISH		-	-	-	1	-
		Nr.	DWG. NO.	TITLE/ NAME	MAT'L	REFERENCE
		DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW
		Y.H.JOO			J.K.HAN	3
		DATE			2024.10.24	
		TITLE			MODEL	
		QNEB OUTLINE DRAWING			QNEB	
		Qlight			QNEB_OUT	
		DWG. NO.			SCALE	
		N/S			SIZE	
		A4			REV	
		00			SHEET	
		1/1				