

Ø125mm Bulb Revolving Warning Lights

S125 Series



S125U Bulb Revolving Warning Light

| Model number | Voltage | Current | Bulb | | | Certificates | Weight | Color |
|--------------|---------|---------|--------|------------|----------|--------------|--------|-----------|
| | | | Spec | Standard | Parts no | | | |
| S125U | DC12V | 965mA | 12V10W | T16x35 15S | 9 | | 0.41kg | ● R-Red |
| | DC24V | 565mA | 24V10W | T16x35 15S | 10 | | 0.41kg | ● A-Amber |
| | AC110V | 130mA | 12V10W | T16x35 15S | 9 | | 0.65kg | ● G-Green |
| | AC220V | 65mA | 12V10W | T16x35 15S | 9 | | 0.65kg | ● B-Blue |

· Protection rating: IP44

※ CE Compliant: DC12V, DC24V




S125U

Technical Diagram

Units: mm

·S125U

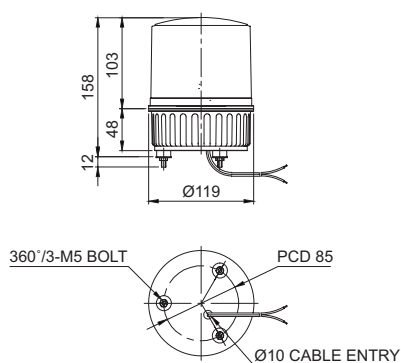

Wiring Instructions

- External Power line - UL1015 AWG18(0.75sq) x 2C 400mm
- DC Type: Black output line is negative(-)
- AC compatible type shall be connected the black and white wires when using AC110V, and the black and red wires when using AC220V.

Customization

- 2 buzzer sound types: Both prolonged (beep, beep) and staccato(beep, beep, beep) buzzer output available
- Wall mount bracket options: Bracket structure allows for threading through the bracket hole or into the wall mount



Wall Mount Bracket
SWP125



Wall Mount Bracket
SWM125

Ordering Specification

| | | | | | | |
|----------------|---|-------------------|---|------------|---|-----------|
| S125U | - | BZ | - | 220 | - | R |
| [Model number] | | [Buzzer option] | | [Voltage] | | [Color] |
| S125U | | (None) | | 12-DC12V | | ● R-Red |
| | | - No buzzer | | 24-DC24V | | ● A-Amber |
| | | BZ | | 110-AC110V | | ● G-Green |
| | | - Built-in buzzer | | 220-AC220V | | ● B-Blue |